

**An Ideal Speaker for Individual or Package Sales with High Quality Home Cinema Amplifiers and Receivers.**



Black finish available

- Floorstanding Speaker Design
- Dual 16cm Cone Woofers and 3cm Dome Tweeter
- High Sensitivity (90dB/2.83V/1m) and Wide Dynamic Range Design for Contemporary AV and HiFi Sources
- Magnetic Shielding Allows Placement Near a TV
- 240W High Power Input Capacity

#### Main Specifications

Design	2-way bass-reflex
Woofers	Dual 16cm cone
Tweeter	3cm dome
Magnetic Shielding	Yes
Frequency Response	35 Hz–35 kHz
Input Power	
Maximum	240 W
Nominal	80 W
Sensitivity	90 dB/2.83 V/1 m
Impedance	6 ohms
Crossover Frequency	2 kHz
Dimensions (W x H x D)	233 x 880 x 271 mm
Weight	12.5 kg

## Dual 16cm Cone Woofers and 3cm Dome Tweeter

The cone woofer used in the previous model in this series has been refined for higher performance and even the blend of the cone has been improved. The soft dome tweeter has a strong frame for stable performance and will reproduce vocals and high range sounds with virtually no distortion.

## High Sensitivity and Wide Dynamic Range

The NS-50F has an extremely high sensitivity of 90dB/2.83V/m and a wide dynamic range, ensuring accurate reproduction of the latest digital sources.

## 240W High Power Input Capacity


Its dual 16cm woofer design enables the NS-50F to handle a huge 240W of input power, so you'll hear the loudest peaks in movies and rock music with ideal clarity.

## Magnetic Shielding Allows Placement Near a TV

Magnetic shielding means there is no distortion-causing interference when the speaker is placed near a TV or other monitor.

## Latest 6.1-Channel Home Cinema Sound (Recommended Combination)

Yamaha recommends a 6.1-channel combination of the NS-50F (for front L/R), the NS-P70 (for center, surround L/R and surround back), and the YST-SW215 (subwoofer). Yamaha 6.1-channel systems are compatible with the latest 6.1-channel movie sound formats, such as Dolby Digital EX, DTS-ES and DTS 96/24. To enjoy the full dynamic potential of contemporary movies, this Yamaha combination is ideal.

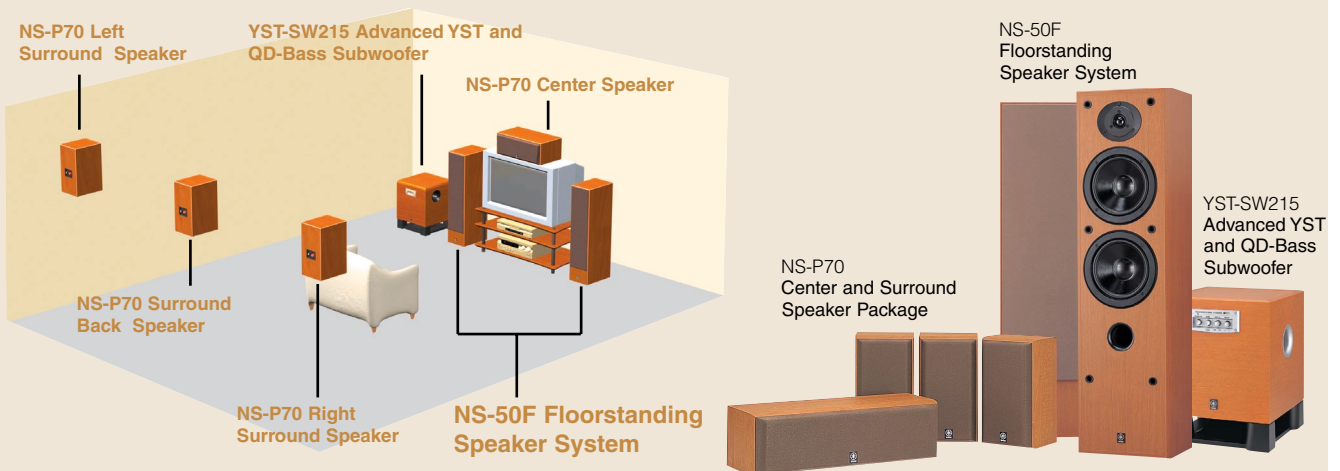

**NS-P70**  
Center and Surround  
Speaker Package

Black finish available in some areas

- 2-Way Acoustic Suspension Design
- Magnetic Shielding (all Speakers)
- Dual 10cm Cone Woofer and 2.2cm Dome Tweeter (Center)
- 10cm Cone Woofer and 2.2cm Dome Tweeter (3 Satellites)
- Frequency Response: 70 Hz–30 kHz (Center); 80 Hz–30 kHz (3 Satellites)
- Impedance: 6 ohms
- Input Power (Max/Nominal): 180 W/60 W (Center); 150 W/50 W (3 Satellites)
- Sensitivity: 91 dB/2.83V/1 m (Center); 90 dB/2.83 V/1 m (3 Satellites)
- Dimensions (W x H x D): 465 X 135 X 174 mm (Center); 150 x 265 x 156 mm (3 Satellites)
- Weight: 3.5 kg (Center); 2.3 kg (3 Satellites)

• Product designs and specifications are subject to change without notice.



**YST-SW215**  
Advanced YST and QD-  
Bass Subwoofer

Black finish available in some areas

- Advanced YST (Yamaha Active Servo Technology)
- QD-Bass (Quatre Dispersion Bass) Technology
- 150W Dynamic Power
- BASS (Bass Action Selector System)
- 20cm Multi-Range Driver with Magnetic Shielding
- 30–200Hz Low Frequency Reproduction
- Auto Standby with Sensitivity Selector (HIGH, LOW and OFF)
- Low (0.5W) Standby Power Consumption
- Dimensions (W x H x D): 290 x 360 x 322 mm
- Weight: 11.5 kg